


Lugged Butterfly Valve - PN16 (NBR)

Features:

- Cast iron body
- PN16 threaded bolt pattern (metric)
- NBR seat (Temp. rating -35°C – 80°C)
- Resilient seated
- Nominal pressure: 1.6 mPa (16 bar)
- Aluminium handle with ten position stainless steel notch plate (SS316)
- CF8M disc (SS316)
- Epoxy resin powder paint according to ISO 21809

wam

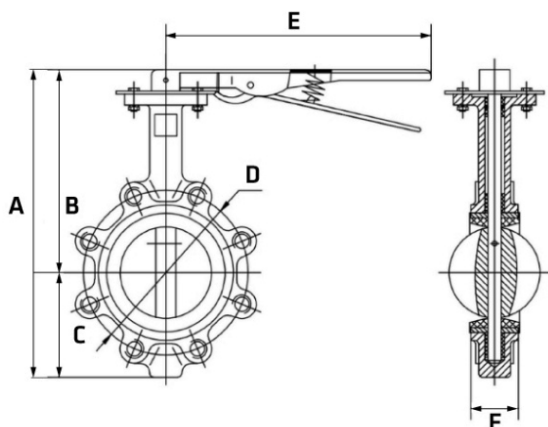

Code	Size	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
AA-VW65L-PN16-NBR	2 1/2"	298	207	91	145	220	45.0
AA-VW80L-PN16-NBR	3"	312	213	99	159	263	44.2
AA-VW94L-PN16-NBR	4"	348	233	115	180	264	51.1
AA-VW96L-PN16-NBR	6"	397	258	139	240	260	54.8
AA-VW98L-PN16-NBR	8"	455	279	175	295	365	59.6