


Lugged Butterfly Valve - ANSI150 (NBR)

Features:

- Cast iron
- ANSI 150 threaded bolt pattern (metric)
- NBR seat (Temp. rating -35°C – 80°C)
- Resilient seated
- Nominal pressure: 1.6 mPa (16 bar)
- Aluminium handle with ten position stainless steel notch plate (SS316)
- CF8M disc (SS316)
- Epoxy resin powder paint according to ISO 21809

wam

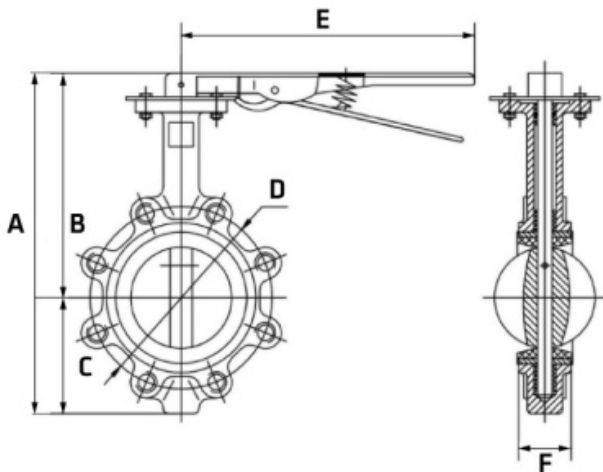

Code	Size	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
AA-VW80L 150#-NBR	3"	308	212	96	152.4	263	44.2
AA-VW94L 150#-NBR	4"	348	233	115	190.5	260	51.1
AA-VW96L 150#-NBR	6"	397	258	139	241.3	260	54.8
AA-VW98L 150#-NBR	8"	476	301	175	298.5	365	59.6
AA-VW99L 150#-NBR	10"	535	332	203	363.0	363	65.0