


Lugged Butterfly Valve - PN16 (EPDM)

Features:

- Cast iron body
- PN16 threaded bolt pattern (metric)
- EPDM seat (Temp. rating -35°C – 120°C)
- Resilient seated
- Nominal pressure: 1.6 MPa (16 bar)
- Aluminium handle with ten position stainless steel notch plate (SS316)
- CF8M disc (SS316)
- Epoxy resin powder paint according to ISO 21809

wam

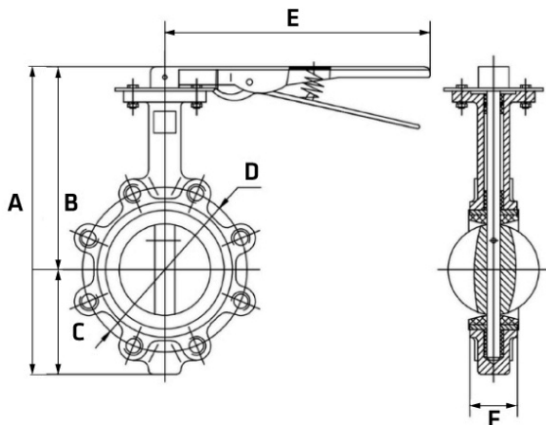

Code	Size	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
AA-VW65L-PN16-EPDM	2 1/2"	298	207	91	145	220	45